



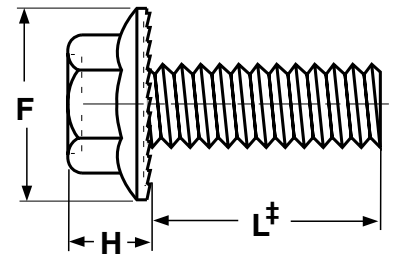

# Bolts & Cap Screws

## Serrated Hex Flange Bolts



Size (Diameter & Thread Pitch)	W		H		F	
	Width Across Flats		Thickness		Flange Diameter	
	Max	Min	Max	Min	Max	Min
6-32	.187	.181	.157	.132	.266	.254
8-32	.250	.244	.186	.161	.355	.341
10-24	.312	.305	.210	.185	.441	.425
10-32	.312	.305	.210	.185	.441	.425
1/4-20	.375	.367	.240	.216	.531	.513
5/16-18	.500	.491	.298	.274	.706	.686
3/8-16	.562	.552	.331	.307	.793	.771
7/16-14	.625	.612	.385	.365	.884	.856
1/2-13	.750	.736	.510	.470	1.070	1.020
5/8-11	.9375	.922	.620	.580	1.330	1.280

Tolerance on Length	Nominal Screw Size	Nominal Screw Length			
		Up to 1/2 in., incl.	Over 1/2 in. to 1 in., incl.	Over 1 in. to 2 in., incl.	Over 2 in. to 4 in., incl.
	No. 6 thru 10	-0.02	-0.03	....	....
	1/4 thru 3/8	-0.03	-0.03	-0.06	....
	7/16 thru 1/2	-0.03	-0.03	-0.06	-0.09
	9/16 thru 3/4	....	-0.03	-0.08	-0.10

ANSI/ASME B18.2.1

‡Length of a serrated flange bolt is measured from the bottom of the serrations to the extreme end of the bolt.

**The value-added source for quality bolts, screws, nuts, washers and other industrial fasteners.**

3211 West 9th Street, Trainer, PA 19061-5242 TOLL FREE: 1-800-662-7459 LOCAL: 610-485-5700 FAX: 610-485-5877

E-MAIL: [sales@coburnmyers.com](mailto:sales@coburnmyers.com)